
SERIES AH

Custom air handling units

Indoor and outdoor air handlers in any arrangement: stacked, split for rigging, or built around a footprint you already have.

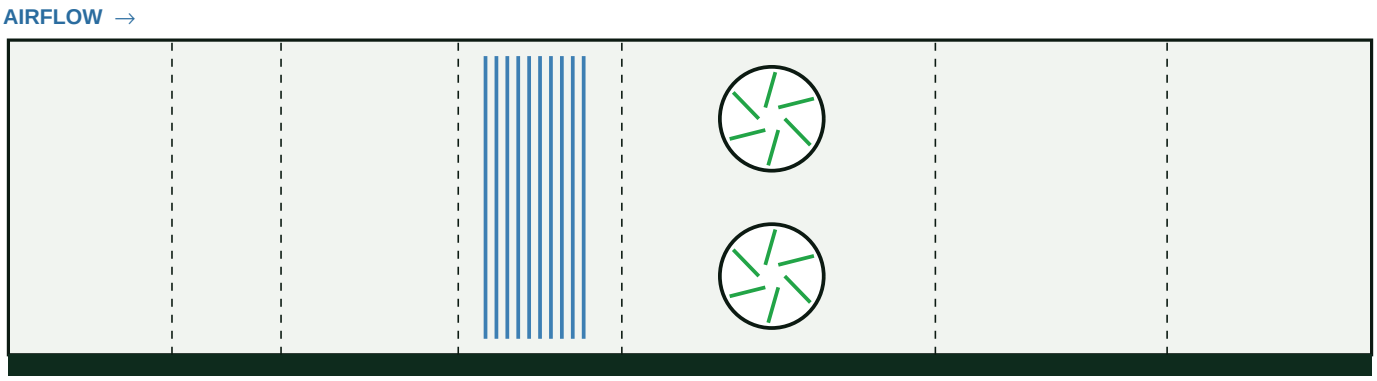

Typical specifications

AIRFLOW	**2,000 to 150,000 CFM**
CASING	**2 in. or 4 in. double-wall, thermally broken**
CASING LEAKAGE	**1% or less of design airflow**
PANEL DEFLECTION	**L/240 at 8 in. w.g.**
CONSTRUCTION	**Indoor, outdoor, stacked, split or knockdown**

Every unit includes

- Selection, performance and sound data for your project
- General-arrangement drawings for approval before fabrication
- Factory run test for airflow, vibration and casing leakage
- Witness testing on request
- Installation, operation and maintenance manual

Get a selection for your project

Call 1-800-716-8955 or email info@customairequipment.com.
Or design your unit in 3D at customairequipment.com/design