
SERIES IF

Industrial fans

Centrifugal, mixed-flow and vaneaxial fans for process air, fume exhaust and material handling, in alloys matched to the airstream.

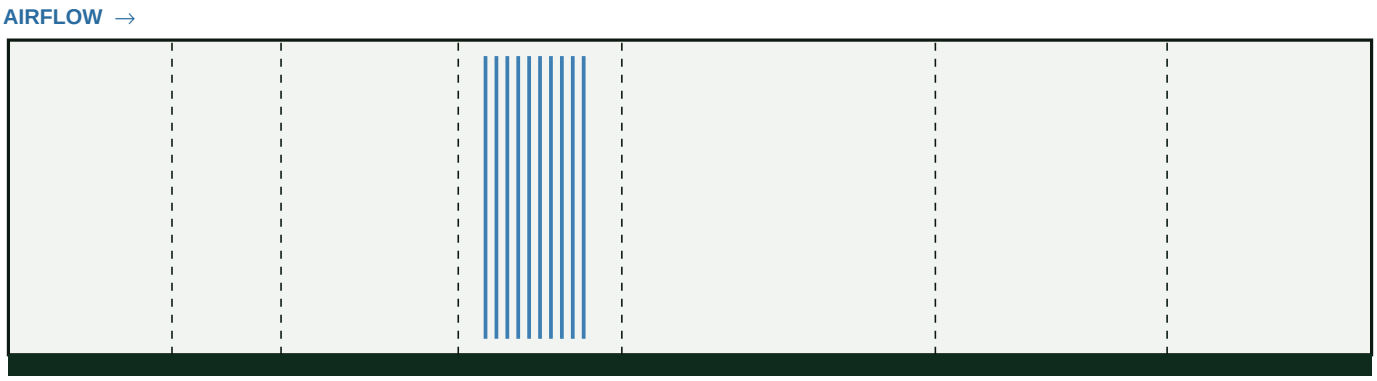

Typical specifications

AIRFLOW	**to 250,000 CFM**
PRESSURE	**to 30 in. w.g.**
AIR TEMPERATURE	**to 800 °F**
WHEELS	**Airfoil, backward-inclined, radial, radial-tip**
SPARK RESISTANCE	**AMCA 99-0401 Type A, B or C**

Every unit includes

- Selection, performance and sound data for your project
- General-arrangement drawings for approval before fabrication
- Factory run test for airflow, vibration and casing leakage
- Witness testing on request
- Installation, operation and maintenance manual

Get a selection for your project

Call 1-800-716-8955 or email info@customairequipment.com.
Or design your unit in 3D at customairequipment.com/design